






# TAPE

## MATCHED TO YOUR PLANS

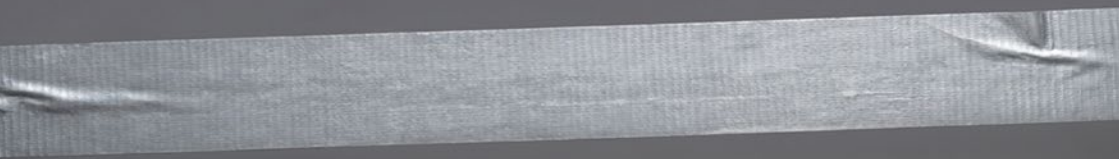

# TAPE CATEGORIES

	Type type	Intended use	Application	Removal time	Moisture resistance
	<b>Packaging tape</b>	office and warehouse work	indoor	-	✗
	<b>Stucco masking tape</b>	facades, plaster, concrete	indoor and outdoor	-	✓
	<b>Yellow masking tape</b>	painting work	indoor	3 days	✗
	<b>Blue masking tape</b>	painting work	indoor and outdoor	14 days	✓
	<b>Double-sided tape</b>	fixing carpets and lightweight items	indoor	-	✗
	<b>Red-white warning tape</b>	marking hazardous areas	indoor and outdoor	-	✓
	<b>Self-adhesive red-white warning tape</b>	marking hazardous areas	indoor and outdoor	-	✓
	<b>Yellow-black warning tape</b>	marking hazardous areas	indoor and outdoor	-	✓
	<b>Grey repair tape</b>	repairing, joining	indoor and outdoor	-	✓
	<b>Orange repair tape</b>	repairing, joining	indoor and outdoor	-	✓
	<b>CAMO repair tape</b>	repairing and joining in outdoor conditions	indoor and outdoor	-	✓
	<b>Yellow WASHI masking tape</b>	painting work	indoor and outdoor	14 days	✓
	<b>Purple WASHI masking tape</b>	painting work	indoor	30 days	✓
	<b>Green WASHI masking tape</b>	painting work	indoor and outdoor	30 days	✓
	<b>Masking film with tape</b>	painting work			✓



NEO  
TOOLS

**1+1 GRATIS**

**TAŚMA PAKOWA**

40m  
46mm

**SUPER  
DURABLE**

- 1. Taśma pakowa
- 2. Packing tape
- 3. Ци́пва
- 4. Płótno pakowate
- 5. Саша пакава
- 6. Strójba na pakowanie
- 7. Hviezda na pakowanie
- 8. Bando / embalar
- 9. Päckband
- 10. Cesta pakowociva
- 11. Těplo páska
- 12. Bítka a pítka
- 13. Taka je górnje
- 14. Pakovanje
- 15. Pakovanje
- 16. Pakovanje
- 17. Pakovanje
- 18. Pakovanje
- 19. Pakovanje
- 20. Pakovanje

# Brown packaging tape

56-055; 56-056; 56-057

**SUPER DURABLE**

## Technical features:

- brown packaging tape
- thickness: 40 mic
- made of OPP film - resistant to tearing, puncturing and abrasion, offering high strength despite low thickness, combined with acrylic adhesive for good UV and ageing resistance



	56-055	56-056	56-057
<b>1+1</b>	<b>40m</b> ↓48mm	<b>50m</b> ↓50mm	<b>100m</b> ↓50mm


# Transparent packaging tape

56-058; 56-059

**SUPER DURABLE**

## Technical features:

- transparent packaging tape
- thickness: 40 mic
- made of OPP film - resistant to tearing, puncturing and abrasion, offering high strength despite low thickness, combined with acrylic adhesive for good UV and ageing resistance

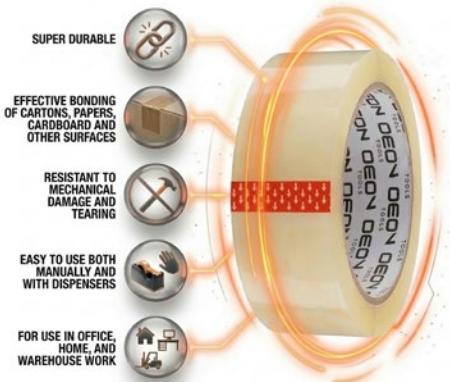

	56-058	56-059
<b>1+1</b>	<b>40m</b> ↓48mm	<b>50m</b> ↓50mm

Та́рма тынкарска

Masking tape

Стрічка захисна штукагерка

NEO  
TOOLS

20m  
48mm



weather  
proof



**SUPER  
STRONG**



**EXTREME** ■■■

# Orange stucco masking tape

56-060; 56-061

## Technical features:

- orange stucco masking tape
- made of durable PE film, ensuring high resistance to moisture, UV radiation and mechanical damage; the hot-melt adhesive layer guarantees strong and stable adhesion to various surfaces, including plaster, concrete, brick and facade elements
- for indoor and outdoor use

**SUPER DURABLE**

**weather proof**



56-055

**40m**  
48mm

56-056

**50m**  
50mm





Taśma malarska papierowa

Masking tape  
Стрічка мулярська

50m  
48mm



3 days

SOFT  
PRECISION



8906692692441  
neo-tools.com

EXTREME

Taśma malarska papierowa

Masking tape  
Стрічка мулярська

50m  
48mm



14 days

PRECISION

EXTREME

# Yellow paper masking tape


56-062; 56-063; 56-064; 56-065; 56-066; 56-067

SOFT  
PRECISION

3 days

## Technical features:

- yellow paper masking tape
- thickness: 140±10 mic
- for indoor use, 3-day removal
- made of crepe paper with increased flexibility, allowing it to adapt to curves and irregular shapes, combined with rubber adhesive with high initial tack

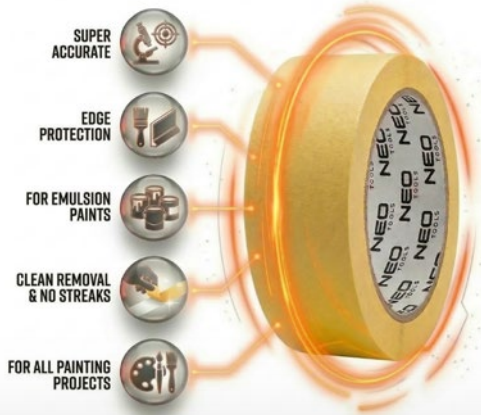

	56-062	56-063	56-064
<b>1+1</b>	25m ↓25mm	50m ↓25mm	25m ↓38mm
	56-065 50m ↓38mm	56-066 25m ↓48mm	56-067 50m ↓48mm



# Blue masking tape

56-068; 56-069; 56-071; 56-072; 56-073


## Technical features:

- blue masking tape
- thickness: 100±10 mic
- UV-resistant
- for indoor and outdoor use
- recommended removal time: up to 14 days
- made of crepe paper characterized by good flexibility and the ability to conform to uneven and curved surfaces, combined with acrylic adhesive with controlled adhesion strength; resistant to UV radiation

PRECISION

UV  
protection

14 days

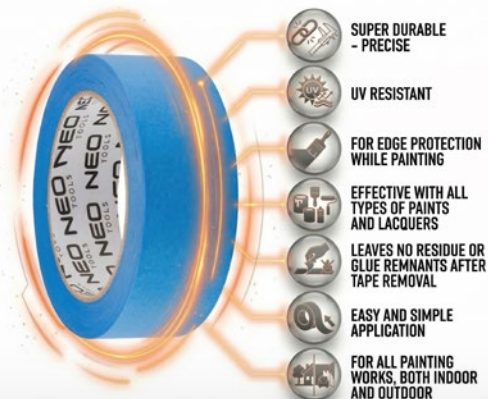

56-068

25m  
↓25mm

56-069

50m  
↓25mm

56-071

25m  
↓38mm

56-072

50m  
↓38mm

56-073

25m  
↓48mm





## Double-sided tape


56-074; 56-075; 56-076

DOUBLE  
SIDED



### Technical features:

- double-sided
- made of polypropylene film (PP) with high strength and stretch resistance, hot-melt adhesive with high bonding power, and cotton paper liner for easy tearing

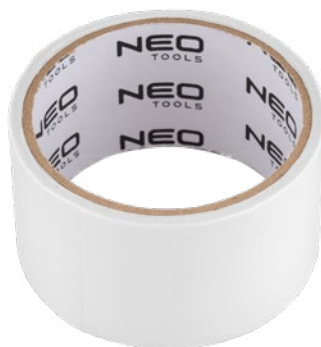

**SUPER ADHESIVE**  
STRONG GRIP ON ANY  
SURFACE



**EFFECTIVE  
MOUNTING**  
(FLOOR COVERINGS,  
CARPETS,  
LIGHT &  
MEDIUM-WEIGHT ITEMS)



**EASY AND SIMPLE  
TO APPLY**



**FOR  
INDOOR  
USE**



56-074

**5m**  
150mm

56-075

**25m**  
150mm

56-076

**50m**  
150mm






# Red-white warning tape

56-077


## Technical features:

- warning tape
- red-white
- made of polyethylene (PE) with high flexibility and stretch resistance

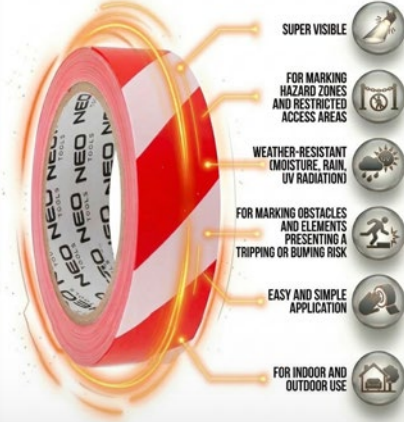

SUPER VISIBLE

100m  
150mm

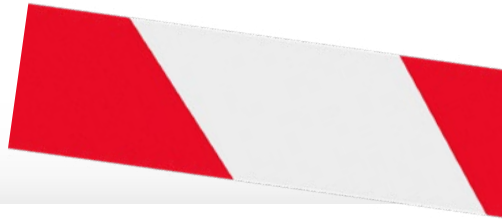


# Self-adhesive red-white warning tape

56-078

## Technical features:

- warning, self-adhesive
- red-white
- made of PVC film providing increased flexibility and resistance to scratches and damage during use. The strong acrylic adhesive layer ensures durable adhesion to surfaces such as concrete, metal, tiles, plastics and painted substrates

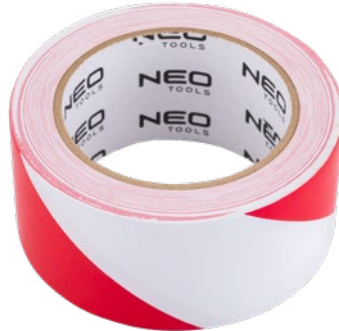

SUPER VISIBLE



33m  
150mm



# Yellow-black warning tape



56-079

**SUPER  
VISIBLE**

**500m**  
**175mm**

## Technical features:

- warning tape
- yellow-black
- made of polyethylene (PE) with high flexibility and stretch resistance

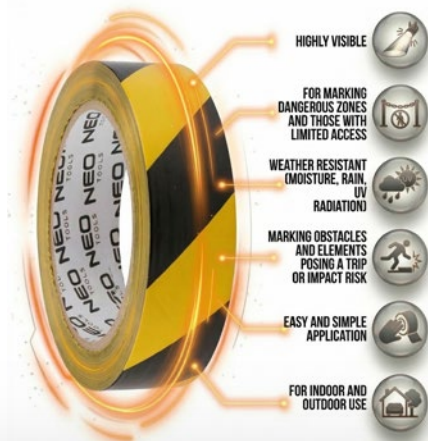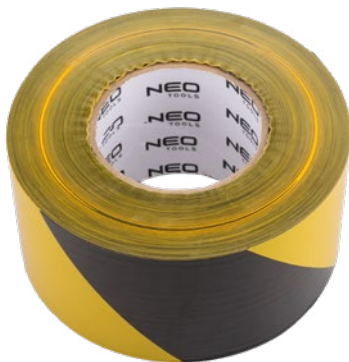



Taśma naprawcza

ORANGE DUCT TAPE

NEO  
TOOLS

10m  
150mm



SUPER  
STRONG



EXTREME

# Repair tape

56-080; 56-081; 56-082

## Technical features:

- repair tape
- thickness: 170 mic
- made on a polyethylene (PE) base, reinforced with mesh to increase mechanical resistance, and a strong hot-melt adhesive ensuring high adhesion
- grey



**SUPER STRONG**



- ULTRA DURABLE**
- EFFECTIVE FOR REPAIRING, JOINING, SEALING, COVERING, AND PROTECTING SURFACES**
- High adhesive strength on uneven surfaces**
- Resistance to moisture and outdoor conditions**
- Flexibility to conform to shapes**
- Durable and resistant to mechanical damage**
- Universal and waterproof**

56-080

**10m**  
↑  
**150mm**

56-081

**25m**  
↑  
**150mm**

56-082

**50m**  
↑  
**150mm**

# EXTREME ORANGE repair tape

56-085;

## Technical features:

- repair tape
- thickness: 170±10 mic
- made of polyethylene (PE) film, reinforcing mesh increasing mechanical resistance, and strong hot-melt adhesive ensuring high adhesion



**SUPER STRONG**



**10m**  
↑  
**150mm**

- SUPER DURABLE**
- VERSATILE: REPAIRS, CONNECTS.**
- INTENSE ORANGE: SUPER VISIBLE.**
- MESH REINFORCED: STRONG.**
- STRONG ADHESIVE: ALSO FOR UNEVEN.**
- MOISTURE AND WEATHER RESISTANT.**
- WATERPROOF AND UNIVERSAL**
- EASY APPLICATION**
- INDOOR AND OUTDOOR**

# EXTREME CAMO repair tape

56-086

**SUPER  
STRONG**



**10m**  
150mm

## Technical features:

- repair tape
- thickness: 170±10 mic
- made of polyethylene (PE) film, reinforcing mesh increasing mechanical resistance, and strong hot-melt adhesive ensuring high adhesion



**SUPER DURABLE**

**EFFECTIVE  
REPAIR & PROTECTION**

**TEAR RESISTANT  
(MESH)**

**STRONG ADHESION  
ON UNEVEN SURFACES**

**MOISTURE  
RESISTANT**

**WATERPROOF  
& VERSATILE**

**EASY & QUICK  
APPLICATION**

**OUTDOOR, CAMPING,  
SURVIVAL**

**CAMOUFLAGE**

**TACTICAL & FIELD  
EQUIPMENT**





**Tašma malarska**  
**WASHI / JAPOŃSKA**  
Washi masking tape  
Malarska strizka aauli  
**NEO TOOLS**  
50m  
24mm  
14 days  
SOFT PRECISION  
UV PROTECTION

**Tašma malarska**  
**WASHI / JAPOŃSKA**  
Washi masking tape  
Malarska strizka aauli  
**NEO TOOLS**  
50m  
24mm  
14 days  
CLEAN EDGES  
PRECISION  
UV PROTECTION  
**EXTREME**  
neo-tools.com  
88-110

**NEO TOOLS**  
**WASHI JAPON**  
Malarska strizka  
500ml  
14 days

## Japanese masking tape - washi

56-110; 56-111; 56-112

### Technical features:

- Japanese masking tape - washi
- UV-resistant
- thickness:  $100 \pm 10$  mic
- made of washi paper - thin, durable, stretch-resistant - with acrylic adhesive of controlled tack; good UV and ageing resistance



CLEAN  
EDGES  
PRECISION

14 days

UV  
protection



56-110    56-111    56-112

50m  
124mm

50m  
136mm

50m  
148mm

## Delicate Japanese masking tape - washi

56-120; 56-121; 56-122

### Technical features:

- delicate Japanese masking tape - washi
- UV-resistant
- thickness:  $100 \pm 10$  mic
- made of washi paper - thin, durable, stretch-resistant - with acrylic adhesive of controlled tack; good UV and ageing resistance



SOFT  
PRECISION

30 days

UV  
protection



56-120    56-121    56-122

50m  
124mm

50m  
136mm


50m  
148mm

# Japanese masking tape - washi

56-130; 56-131

## Technical features:

- Japanese masking tape - washi
- UV-resistant
- thickness: 100±10 mic
- made of washi paper - thin, durable, stretch-resistant - with acrylic adhesive of controlled tack; good UV and ageing resistance

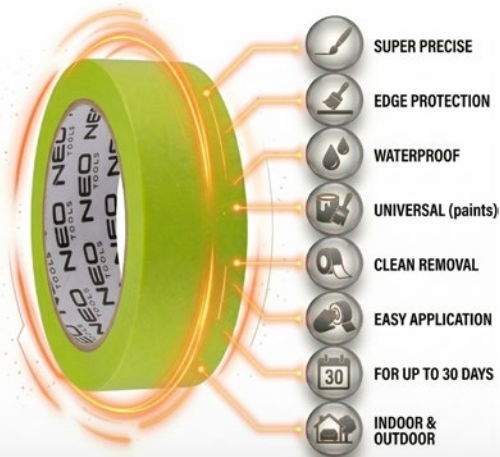

ALL  
PAINT  
PRECISION

30 days

UV  
protection



56-130

50m  
36mm

56-131

50m  
48mm





# Masking film with washi tape

56-100; 56-101

with  
WASHI  
TAPE

excellent  
static

## Technical features:

- with 1.5 cm wide washi tape
- made of high-quality HDPE film, protects furniture and floors from paint, dust and dirt, while the precise washi tape enables perfectly clean edges without paint seepage



2-IN-1:  
PRE-TAPED FILM



DURABLE  
FILM



HYDROPHOBIC  
TAPE



SURFACE  
PROTECTION



56-100

15m  
↓ 1,5m

56-101

15m  
↓ 2,7m



# NEO TOOLS - PROFESSIONAL EXPERT TIPS SECTION

## Painter's tape

Did you know that painter's tape is best **removed at an angle of approx. 45°** to the surface?

Reduces paint edge tension and prevents tearing.

## Painter's tape

It is best to **remove the tape** while the paint is still slightly damp or just 'touch dry'.

Prevents cracking and paint edge peeling.

## Painter's tape

If the paint has dried, **gently score** its edge with a knife before removing the tape.

Separates the paint film from the tape and prevents it from lifting.

## Painter's tape

Before applying tape, always **degrease and clean** the surface.

Dust and grease cause paint bleed under the tape.

## Painter's tape

After applying, **press down** on the tape edge with a putty knife or plastic card.

Seals the edge and prevents paint bleed.

## Painter's tape

Do **not rip** the tape off abruptly – pull slowly and evenly.

A quick jerk increases the risk of damaging the finish.

## Painter's tape

Apply tape **in short sections** (approx. 20–30 cm).

Helps maintain a straight line and apply accurate pressure.

## Painter's tape

On a freshly painted surface, use tape with **low adhesion strength**.

Protects fresh paint from damage.

## Painter's tape

The tape should ideally be **removed within 24 hours** of painting (unless the manufacturer states otherwise).

After a longer period, the adhesive can bond more strongly to the surface.

## Washi tape

Did you know that Washi tape allows for very sharp paint lines...

Precision finishing for decorative patterns and geometries.

## Plasterer's tape

During facade work, it's worth **pressing down the tape along the edge** before applying plaster.

Prevents mortar from seeping under.

## Plasterer's tape

Exterior tapes are best **removed** immediately after completing work, before the mortar sets. Easier to peel off.

## Double-sided tape

Did you know that the surface should be **clean and degreased**...

Maximum adhesion.

## Double-sided tape

Many double-sided tapes reach full strength **after a few hours of pressure**.

Better assembly durability.

## Double-sided tape

For heavier elements, it's worth **pressing down hard** on the tape for a few seconds.

Better adhesive activation.

## Painter's / Washi tape

If you are painting two wall colors, **paint the base color first**, then apply tape and the second color.

Perfectly clean color line.

## Painter's tape

You can **first apply a thin layer of base-color paint along the tape edge**.

Seals the edge and eliminates paint bleed.